

**DESCRIPTION**

- Metal construction with chrome plated, LifeShine® brushed nickel, oil rubbed brozne, nickel or wrought iron finish
- Includes 10" rainfall showerhead, arm, flange and diverter tub spout
- Includes model 3301 1/2" CC valve

**OPERATION**

- Flow handle (lever) operates counterclockwise through a 180° arc with off at 6 o'clock and maximum flow at the 12 o'clock position. Shut off in clockwise direction
- Temperature handle (knob) operates through a 340° arc with maximum cold at full clockwise rotation (corresponding to the numeral 1) and maximum hot at full counterclockwise rotation (corresponding to the numeral 9)
- Thermostatic pressure balancing mechanism maintains selected discharge temperature to ± 3°F
- Factory established temperature range from 85°F (29°C) to 115°F (46°C)

**FLOW**

- Showerhead is limited to 2.5 gpm max. (9.5 L/min)

**CARTRIDGE**


- Thermostatic pressure balancing cartridge design with non-metallic/nonferrous materials
- 1248 cartridge design with nonmetallic/nonferrous and stainless steel materials

**STANDARDS**


- Third party certified to CSA B125, ASME A112.18.1M, ASSE 1016 and all applicable requirements referenced therein

**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

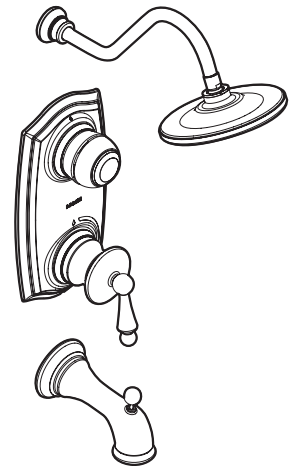

**Waterhill™**  
**ExactTemp® Tub/Shower**  
**Models: S318, S318BN, S318ORB,**  
**S318NL, S318WR**

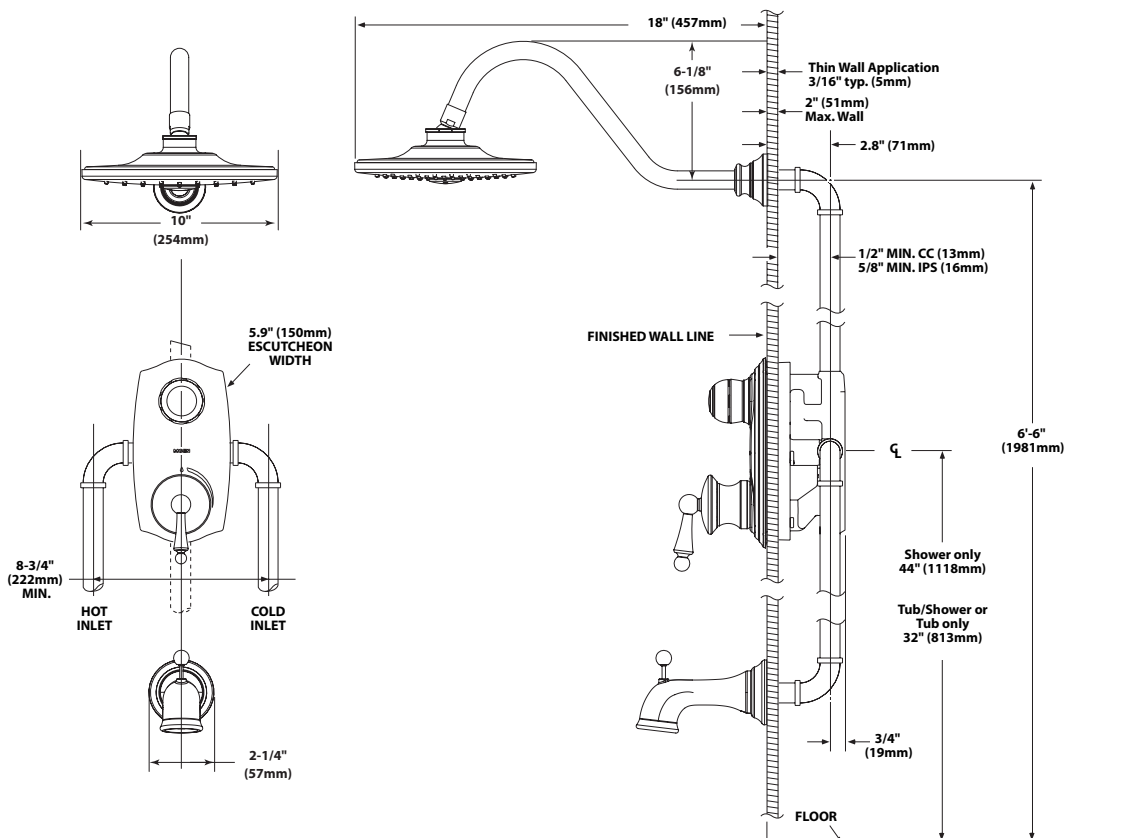

**CRITICAL DIMENSIONS**

(DO NOT SCALE)