

DESCRIPTION

- Metal construction with chrome plated, LifeShine® brushed nickel, or LifeShine® brushed bronze finishes
- Includes 7" rainfall showerhead, arm, flange and diverter tub spout
- Includes model 2570 1/2" CC valve

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°F

FLOW

- Showerhead is limited to 2.5 gpm max. (9.5 L/min)

CARTRIDGE


- 1222 cartridge design
- Nonmetallic/nonferrous and stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1, ASSE 1016, and all applicable requirements referenced therein

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

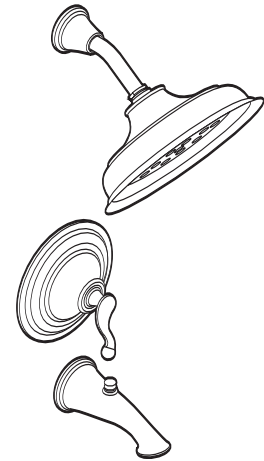

**Savvy™
Single-Handle Posi-Temp® Tub/Shower**

Models: S394, S394BN, S394BB

Applies to shower valve control only

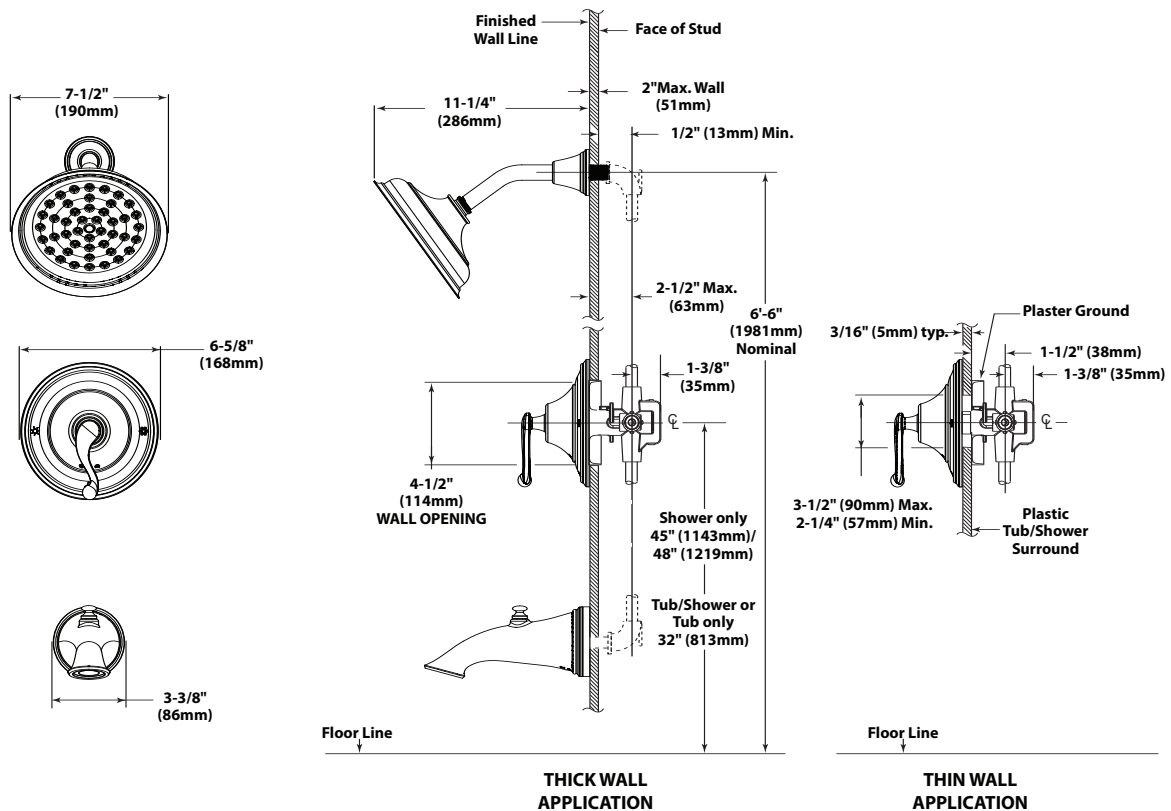

CRITICAL DIMENSIONS

(DO NOT SCALE)